

# MasterConnect LEDtube EM/mains T8



## MC LEDtube IA 600mm HO 7W865 T8

Introducing MasterConnect LEDtubes - smart retrofit LED T8 lamps that give you an easy and seamless way to upgrade to connected lighting. Simply set up with an intuitive app and MasterConnect LED tube lighting can be programmed to maximize energy savings, while providing wireless and automated light for your comfort and convenience. What's more, it is fully scalable and upgradable. If you want to enjoy additional benefits such as remote control or a management dashboard, you can simply keep the lamps you currently have installed and add a gateway to experience all the advantages of a cloud-based system. There's no better way to take lighting solutions to the next level.

#### **Product data**

General Information			
Cap-Base	G13 [Medium Bi-Pin Fluorescent]		
Nominal lifetime	60,000 hour(s)		
Switching Cycle	200,000		
Lighting Technology	LED		
Flux measurement reference	Sphere		
Light Technical			
Color Code	865 [CCT of 6500K]		
Beam Angle (Nom)	160 degree(s)		
Luminous Flux	1,050 lm		
Color Designation	Cool Daylight		
Correlated Color Temperature (Nom)	6500 K		
Luminous Efficacy (rated) (Nom)	150 lm/W		
Color Consistency	<6		
Color rendering index (CRI)	83		

LLMF At End Of Nominal Lifetime (Nom)	70 %
Photobiological safety according to EN 62471	RG0
Operating and Electrical	
Line Frequency	50 to 60 Hz
Input Frequency	50 to 60 Hz
Power Consumption	7 W
Lamp Current (Max)	37 mA
Lamp Current (Min)	34 mA
Starting Time (Nom)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.9
Voltage (Nom)	220-240 V
Ballast Compatibility	EM/Mains
LED alternative to fluorescent lamp power	18 W
Inrush current at mains	4.4


Datasheet, 2025, March 17 data subject to change

# MasterConnect LEDtube EM/mains T8

Max. lamp no. on MCB B type 10A - Mains	242
Max. lamp no. on MCB B type 10A – EM ballast	242
without Compensation Capacitor.	
Max. lamp no. on MCB B type 10A – EM ballast	25
with Compensation Capacitor.	
Max. lamp no. on MCB B type 16A - Mains	388
Max. lamp no. on MCB B type 16A – EM ballast	388
without Compensation Capacitor.	
Max. lamp no. on MCB B type 16A – EM ballast	40
with Compensation Capacitor.	
Temperature	
T-Case Maximum (Nom)	40 °C
Controls and Dimming	
Dimmable	Wireless Dim
Mechanical and Housing	
Product Length	600 mm
Bulb Shape	Т8
Net Weight (Piece)	0.150 kg
Approval and Application	
Energy Efficiency Class	D
Energy Saving Product	Yes

Approval Marks	RoHS compliance KEMA Keur		
	certificate		
Energy Consumption kWh/1000 h	7 kWh		
EPREL Registration Number	406207		
CE mark	Yes		
EU RoHS compliant	Yes		
Flickering value (PstLM) - Flickering value as per	1		
EN 61000-3-3			
Stroboscopic effect visibility measure (SVM)	0.9		
Ambient temperature range	-20 °C to 45 °C		
Product Data			
Order product name	MC LEDtube IA 600mm HO 7W865		
	Т8		
Full product name	MC LEDtube IA 600mm HO 7W865		
	Т8		
Full product code	871869971750600		
Order code	929002295402		
Material Nr. (12NC)	929002295402		
Numerator - Quantity Per Pack	1		
EAN/UPC - Product/Case	8718699717506		
Numerator - Packs per outer box	10		
EAN/UPC - Case	8718699717513		


## Dimensional drawing

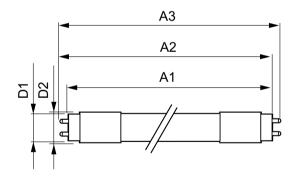


Product	D1	D2	A1	A2	A3
MC LEDtube IA 600mm HO 7W865	25.8 mm	28 mm	588.5 mm	595.5 mm	602.5 mm
Т8					

# MasterConnect LEDtube EM/mains T8

#### Photometric data






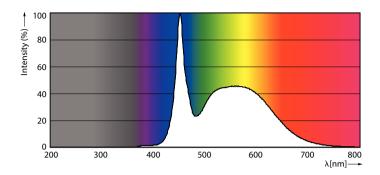


Spectral Power Distribution Colour - MC LEDtube IA 600mm HO 7W865 T8






Light Distribution Diagram - MC LEDtube IA 600mm HO 7W865 T8

## Lifetime

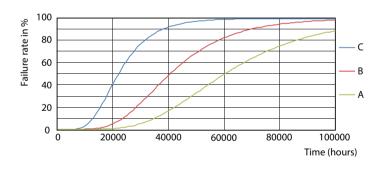

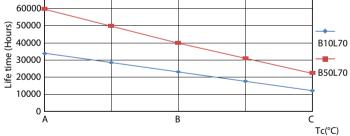


FailureRate


LifetimeVsTc

70000

## **MasterConnect LEDtube EM/mains T8**


## Lifetime

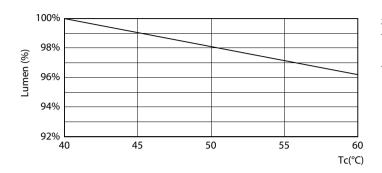

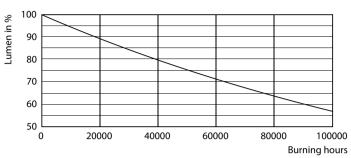

Lumen Maintenance Diagram - MC LEDtube IA 600mm HO 7W865 T8

Lumen Maintenance Diagram - MC LEDtube IA 600mm HO 7W865 T8

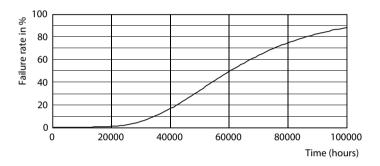

Life Expectancy Diagram



© 2025 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.