


# SYSTEM SHIFT - LINE L

WLD+40039



See  
more


On track luminaire SYSTEM SHIFT - LINE L, with a power of 22 W, high light efficacy 105 lm/W. It is made of high-quality components, supported by a 5-year warranty. It also stands out for its very high colour rendering index RA>90. It shines with a warm light (3000K), which promotes relaxation and rest, making the illuminated room cosier. Designed to be mounted on a track.

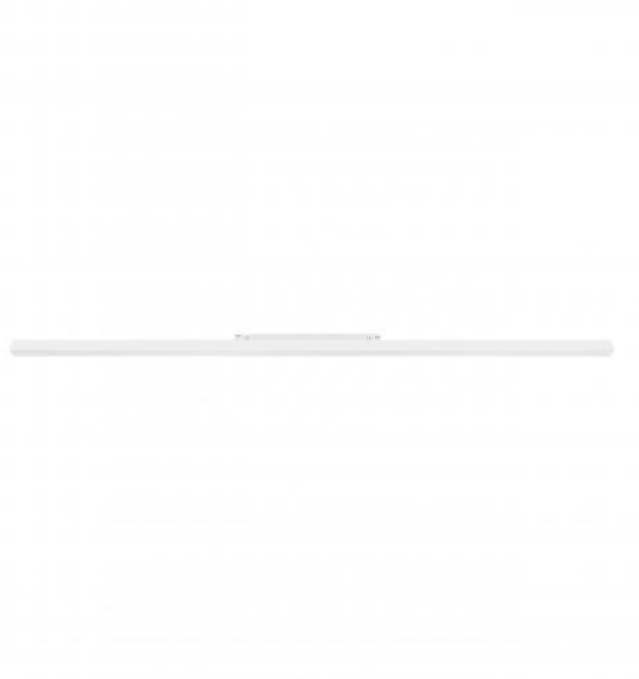

Power	<b>22 W</b>	Voltage	<b>48 V</b>
Colour temperature	<b>3000 K</b>	Colour of light	<b>WW</b>
Beam angle	<b>100 °</b>	Degree of protection (IP)	<b>IP20</b>


## Technical data

Code	WLD+40039
Power	22 W
Nominal current	435 mA
Voltage	48 V
Energy consumption	22 kWh/1000h
Frequency	DC Hz
Protection class	III
Power factor	1
Useful luminous flux*	2300 lm (360°)
Luminous flux**	1100 lm (360°)
Lamp efficacy	105 lm/W
Luminous intensity	360 cd
Colour temperature	3000 K
Colour of light	WW
Beam angle	100 °
RA	>90
Light source included	Yes
Producer of LED diodes	osram
Uniformity of color SDCM max	5
Dimmable	No
Working temperature range	-20 to +40 °
Lifespan	50000 h
Housing material	AL+PC
Degree of protection (IP)	IP20
Colour	White
Dimension (AxBxC)	902x23x42 mm
For use	Inside
Assembly method	NA SZYŃĘ
Application	Inside
Made in	PRC




## Related documents



 User manual



 Declaration of Conformity



 Photometric file



 3D model

48V

5 lat  
bez ograniczeń  
25000 godzin



23 mm

902 mm

45 mm

25 mm

Montaż oprawy w obrebie szyny na „click” oraz  
możliwość swobodnego jej przesuwania

