



CorePro LEDspot MV



Corepro LEDspot 3.5-35W GU10 830 36D

CorePro LEDspots are a perfect fit for spot lighting and deliver warm halogen-like light. These GU10 LED spot lights are compatible with most existing fixtures with a GU10 LED base and are designed as a retrofit replacement for halogen or incandescent spots. CorePro LEDspots deliver significant energy savings and minimize maintenance costs.

Product data

General Information	
Cap-Base	GU10
Nominal lifetime	15,000 hour(s)
Switching Cycle	50,000
Lighting Technology	LED
Flux measurement reference	Narrow Cone
Light Technical	
Color Code	830 [CCT of 3000K]
Beam Angle (Nom)	36 degree(s)
Luminous Flux	265 lm
Luminous Intensity (Nom)	565 cd
Color Designation	White (WH)
Correlated Color Temperature (Nom)	3000 K
Luminous Efficacy (rated) (Nom)	75.00 lm/W
Color Consistency	<6
Color rendering index (CRI)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %
Luminous Flux in 90° Cone (Rated)	265 lm
Photobiological safety according to EN 62471	RG1

Operating and Electrical		
Line Frequency	50 to 60 Hz	
Input Frequency	50 to 60 Hz	
Power Consumption	3.5 W	
Lamp Current (Nom)	32 mA	
Wattage Equivalent	35 W	
Starting Time (Nom)	0.5 s	
Warm-up time to 60% light	0.5 s	
Power Factor (Fraction)	0.5	
Voltage (Nom)	220-240 V	
Temperature		
T-Case Maximum (Nom)	65 °C	
Controls and Dimming		
Dimmable	No	
Mechanical and Housing		
Bulb Shape	PAR16	
Net Weight (Piece)	0.045 kg	


Datasheet, 2025, March 17 data subject to change

CorePro LEDspot MV

Approval and Application		
Energy Efficiency Class	F	
Suitable For Accent Lighting	Yes	
Energy Consumption kWh/1000 h	4 kWh	
EPREL Registration Number	391856	
CE mark	Yes	
EU RoHS compliant	Yes	
EyeComfort	Yes	
Flickering value (PstLM) - Flickering value as per 1		
EN 61000-3-3		
Stroboscopic effect visibility measure (SVM)	0.4	
Application Conditions		
can it be used in closed luminaires	No	


Product Data	
Order product name	Corepro LEDspot 3.5-35W GU10 830
	36D
Full product name	Corepro LEDspot 3.5-35W GU10 830
	36D
Full product code	871869672833800
Order code	929001217902
Material Nr. (12NC)	929001217902
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8718696728338
Numerator - Packs per outer box	10
EAN/UPC - Case	8718696728345


Dimensional drawing



Product	D	С
Corepro LEDspot 3.5-35W GU10 830 36D	50 mm	54 mm

Photometric data

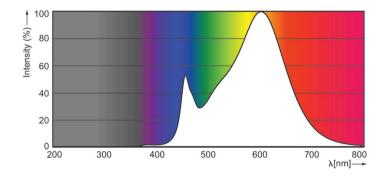




Spectral Power Distribution Colour - Corepro LEDspot 3.5-35W GU10 830 36D

Accent Lighting Spots - Corepro LEDspot 3.5-35W GU10 830 36D


CorePro LEDspot MV


Photometric data



Light Distribution Diagram - Corepro LEDspot 3.5-35W GU10 830 36D

Lifetime

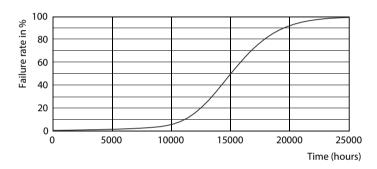

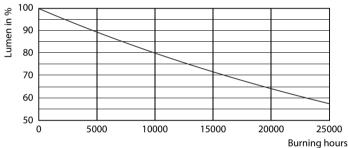

Life Expectancy Diagram

Lumen Maintenance Diagram - Corepro LEDspot 3.5-35W GU10 830 36D



© 2025 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.