



MASTER UltraEfficient LED bulb

MAS LEDBulbND4-60W E27 840 A60 FR G UE

This is the most efficient LED bulb from Philips brand. 210lm/W helps to concrete the company statement of sustainability. 50000 hour lifetime helps to extend the replacement cycle to reduce the waste. This is not only the high SPEC product, but also keep the light quality of Philips brand

Product data

General Information	
Cap-Base	E27 [E27]
Nominal lifetime	50,000 hour(s)
Switching Cycle	50,000
Lighting Technology	LED
Flux measurement reference	Sphere
Light Technical	
Color Code	840 [CCT of 4000K]
Luminous Flux	840 lumen
Color Designation	Cool White (CW)
Correlated Color Temperature (Nom)	4000 K
Luminous Efficacy (rated) (Nom)	210 lm/W
Color Consistency	<6
Color rendering index (CRI)	80
LLMF At End Of Nominal Lifetime (Nom) 70 %

Operating and Electrical	
Line Frequency	50 to 60 Hz
Input Frequency	50 to 60 Hz
Power Consumption	4 W
Lamp Current (Nom)	45 mA
Wattage Equivalent	60 W
Starting Time (Nom)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.4
Voltage (Nom)	220-240 V
Temperature	
T-Case Maximum (Nom)	70 °C
Controls and Dimming	
Dimmable	No


Datasheet, 2023, April 16 data subject to change

MASTER UltraEfficient LED bulb

Mechanical and Housing	
Bulb Finish	Frosted
Bulb Shape	A60 [A 60mm]
Approval and Application	
Energy Consumption kWh/1000 h	4 kWh
EPREL Registration Number	1,370,039
CE mark	Yes
EU RoHS compliant	Yes
Product Data	
Full product code	871951443581000


Order product name	MAS LEDBulbND4-60W E27 840 A60 FR G UE
Order code	929003480102
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material number (12NC)	929003480102
Net weight	0.035 kg
Full product name	MAS LEDBulbND4-60W E27 840 A60 FR G UE
EAN/UPC - Case	8719514435827

Dimensional drawing




Product	D	С
MAS LEDBulbND4-60W E27 840 A60 FR G UE	60 mm	105 mm

Photometric data








Light Distribution Diagram - MAS LEDBulbND4-60W E27 840 A60 FR G UE


MASTER UltraEfficient LED bulb


Photometric data

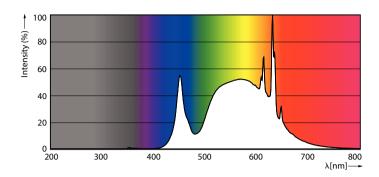

Spectral Power Distribution Colour - MAS LEDBulbND4-60W E27 840 A60 FR G UE

Lifetime

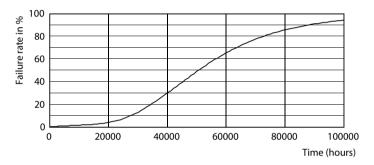



Life Expectancy Diagram - MAS LEDBulbND4-60W E27 840 A60 FR G UE

Lumen Maintenance Diagram - MAS LEDBulbND4-60W E27 840 A60 FR G



© 2023 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.