


# Onefold faceplate, for double switch functions, Niko Toggle steel champagne coated

166-57102

4 year warranty

The Niko Toggle onefold faceplate for a double switch clicks onto a single installed double switch function. The faceplate combines with any available Niko Toggle for double switch functions. It consists of an upper frame and lower frame that are mechanically interconnected. The upperframe is made of steel. The lower frame is made of grey coated polycarbonate (PC) + acrylic-styrene-acrylate (ASA). The upper frame is 2 mm thick and the lower frame 6 mm. Niko recommends a design combination with the Niko Toggle in the following colour: steel champagne coated.

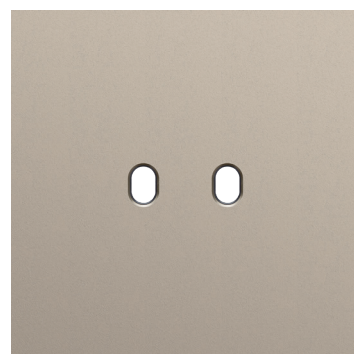

## Technical data

Onefold faceplate, for double switch functions, Niko Toggle steel champagne coated.

- Simple faceplate for one switch.
- Colour: enamelled steel champagne (approximately NCS S 4005 - Y20R, RAL 080 70 10)
- Recommended colour central plate: steel champagne coated
- Frame composition: It consists of an upper frame and lower frame that are mechanically interconnected.
- Material upperframe: The upperframe is made of steel.
- Material lower frame: The lower frame is made of grey coated polycarbonate (PC) + acrylic-styrene-acrylate (ASA)
- Frame thickness: The upper frame is 2 mm thick and the lower frame 6 mm.
- Surface-mounting height: max. 8.5 mm
- Fire safety
  - self-extinguishing: complies with a filament test of 650°C
  - halogen-free
- Protection degree: The combination of a mechanism, a central plate and a faceplate has a protection degree of IP20.
- Impact resistance: The combination of a mechanism, a central plate and a faceplate has an impact-resistance of IK06
- Dimensions (HxWxD): 83 x 83 x 10 mm
- Dimensions visible (HxWxD): 83 x 83 x 8 mm
- Marking: CE

