

Twofold faceplate, vertical 71 mm centre distance, for double switch functions, Niko Toggle steel white coated


154-57852

4 year warranty

The Niko Toggle twofold vertically oriented faceplate clicks onto two double switch functions that have been vertically installed above each other with a centre distance of 71 mm. The faceplate combines with any available Niko Toggle for double switch functions.

It consists of an upper frame and lower frame that are mechanically interconnected. The upperframe is made of steel. The lower frame is made of white coated polycarbonate (PC) + acrylic-styrene-acrylate (ASA), white coated. The upper frame is 2 mm thick and the lower frame 6 mm.

Niko recommends a design combination with the Niko Toggle in the following colour: steel white coated.

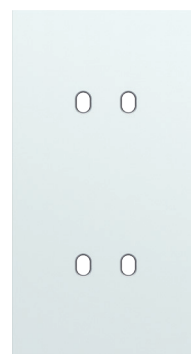

Technical data

Twofold faceplate, vertical 71 mm centre distance, for double switch functions, Niko Toggle steel white coated.

- Double faceplate for two switches.
- Colour: enamelled steel white (approximately NCS S 1002 - B50G, RAL 000 90 00)
- Recommended colour central plate: steel white coated
- Frame composition: It consists of an upper frame and lower frame that are mechanically interconnected.
- Material upperframe: The upperframe is made of steel.
- Material lower frame: The lower frame is made of white coated polycarbonate (PC) + acrylic-styrene-acrylate (ASA), white coated
- Frame thickness: The upper frame is 2 mm thick and the lower frame 6 mm.
- Centre-to-centre distance: 71 mm
- Surface-mounting height: max. 8.5 mm
- Fire safety
 - self-extinguishing: complies with a filament test of 650°C
 - halogen-free
- Protection degree: The combination of a mechanism, a central plate and a faceplate has a protection degree of IP20.
- Impact resistance: The combination of a mechanism, a central plate and a faceplate has an impact-resistance of IK06
- Dimensions (HxWxD): 154 x 83 x 10 mm
- Dimensions visible (HxWxD): 154 x 83 x 8 mm
- Marking: CE

CE

www.niko.eu

niko

154-57852 - 19.01.2024