

WLD+40035_SMART

WLD+40035_SMART




Power	12 W	Voltage	48 V
Colour temperature	3000/4000/6000 K	Colour of light	CCT
Beam angle	25 °	Degree of protection (IP)	IP20

Technical data

Code	WLD+40035_SMART
Power	12 W
Nominal current	230 mA
Voltage	48 V
Energy consumption	12 kWh/1000h
Frequency	DC Hz
Protection class	III
Power factor	1
Useful luminous flux*	1150 lm (360°)
Luminous flux**	800 lm (360°)
Lamp efficacy	96 lm/W
Luminous intensity	3050 cd
Colour temperature	3000/4000/6000 K
Colour of light	CCT
Beam angle	25 °
RA	>90
Light source included	Yes
Uniformity of color SDCM max	5
Working temperature range	-20 to +40 °
Lifespan	50000 h
Housing material	AL+PC
Degree of protection (IP)	IP20
Colour	White
Dimension (AxBxC)	40x297 (900mm wire) mm
For use	Inside
Assembly method	NA SZYŃE
Application	Inside
Made in	PRC
Other	CCT/DIM ,


Related documents



 User manual



 Declaration of Conformity

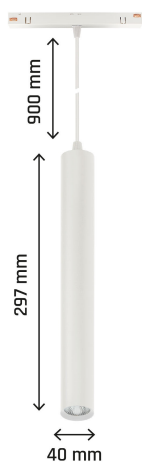

Montaż oprawy w obrębie szyny na „click” oraz
możliwość swobodnego jej przesuwania

