

# PRODUCT DATASHEET

## PANEL D/I 1200 36 W 4000 K UGR19 ZBVR

PANEL DIRECT/INDIRECT 1200 UGR < 19 Zigbee® | Suspended edge-lit luminaires for direct and indirect light emission, low glare, 1200 mm with Zigbee 3.0 technology



PERFOR-  
MANCE  
CLASS

### Areas of application

- Efficient replacement for traditional T8 and T5 luminaires
- Offices
- Meeting rooms
- Conference rooms
- Reception areas and foyers

### Product benefits

- Suitable luminaire for VIVARES and other Zigbee 3.0 Light Management Systems
- Suspended edge-lit luminaires for direct light emission (70% ) and indirect light emission (30%)
- Attractive and functional design for office applications
- Good glare reduction ( $UGR \leq 19$ )
- Very homogenous light
- Low maintenance and low operational costs
- External driver for extended flexibility
- Special light guide design for low-glare illumination
- Easy and quick installation
- Low flicker light thanks to special electronic control gear
- 5 years guarantee

### Product features

- IoT-ready luminaire with Zigbee 3.0 technology



- Rectangular (1200 mm x 300 mm) stand-alone luminaires with direct (70 %) and indirect (30 %) light emission
- Driver integrated into the remote driver box
- UGR  $\leq$  19 according to EN12464-1
- High luminous efficacy: up to 110 lm/W
- Lifetime (L70/B50): 80,000 h (at 25 °C)
- Follows the unified LEDVANCE design language (SCALE design)
- Very slim aluminum housing


## TECHNICAL DATA

### Electrical data


Nominal wattage	36.00 W
Nominal voltage	220...240 V
Mains frequency	50...60 Hz
Nominal current	250.000 mA
Inrush current	30 A
Inrush current time $T_{h50}$	200 $\mu$ s
Max. number of luminaires per miniature circuit breaker B16	11
Max. number of luminaires per miniature circuit breaker C10	10
Max. number of luminaires per miniature circuit breaker C16	16
Power factor $\lambda$	$\geq 0.90$
Total harmonic distortion	$\leq 10 \%$
Protection class	I
Operating mode	External LED driver
Dimming interface	Zigbee 3.0 / IoT

### Photometrical data

Luminous flux	4000 lm
Luminous efficacy	110 lm/W
Color temperature	4000 K
Light color (designation)	Cool White
Color rendering index Ra	$\geq 80$
Standard deviation of color matching	4 sdc <sub>m</sub>
Luminous intensity	-
Low flicker	Yes
Flickering metric (Pst LM)	-
Stroboscope effect metric (SVM)	-
Photobiological safety group acc. to EN62778	RG0
Beam angle	110 °
UGR	< 19

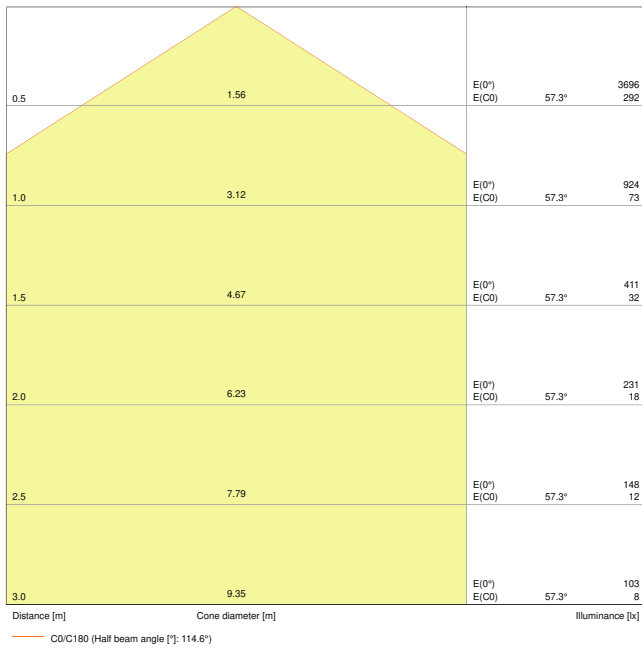


PANEL D I 1200 36W4000K UGR19 ZBVR

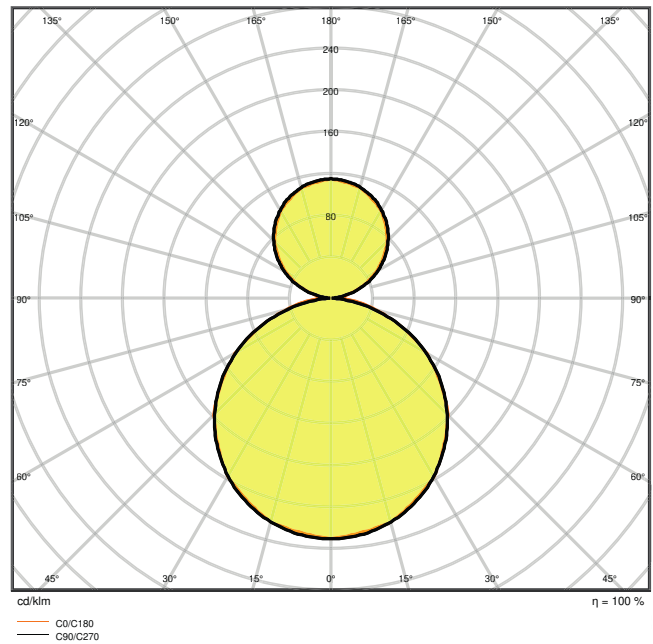

PANEL D I 1200 36W4000K UGR19 ZBVR

Dimensions & Weight

Length	1200.00 mm
Width	300.00 mm
Height	16.00 mm
Product weight	3500.00 g



Materials & Colors

Product color	White
Housing color	White

Body material	Aluminum
Cover material	Polycarbonate (PC)
Light emitting surface material	Polystyrene
Glow Wire Test according to IEC 60695-2-12	650 °C
Mercury content	0.0 mg

### Application & Mounting

Ambient temperature range	-20...+45 °C
Type of connection	Screwless terminal
Type of protection	IP20
Protection class IK (shock resistance)	IK03
Dimmable	Yes
Type of dimming	ZIGBEE
Mounting type	Suspended
Mounting location	Ceiling
Application environment	Indoor
With light source	Yes

### Lifespan

Lifespan L70/B50 at 25 °C	80000 h <sup>1)</sup>
Lifespan L80/B10 at 25 °C	60000 h <sup>1)</sup>
Lifespan L80/B50 at 25 °C	60000 h
Lifespan L90/B10 at 25 °C	50000 h
Number of switching cycles	100000

<sup>1)</sup> t[h]: L70 / B50 @ 25 °C (Ta), t[h]: L80 / B10 @ 25 °C (Ta), t[h]: L90 / B10 @ 25 °C (Ta)

### Control gear

Output current	800 mA
ECG - Output ripple current	≤ 5 %

### Certificates & Standards

Standards	CE / CB / ENEC / TÜV SÜD / EAC
Luminaire with limited surface temperature, "D sign"	No
Ball shot safe	No
Replaceable light source (EPREL)	Not replaceable

### Additional product data















Added function

VIVARES

## EQUIPMENT / ACCESSORIES

– Suspension kit included

## DOWNLOAD DATA

Documents and certificates		Document name
	User instruction / safety instructions	PANEL DIRECT/INDIRECT 1200 UGR 19 ZBVR
	Extended installation guide	Quick Installation Guide Vivares Zigbee
	Legal information	LSI PANEL D I DALI AND ZBVR
	Legal information	Informationstext 18 Abs 4 ElektroG
	Declarations of conformity	PANEL D I 1200 36W 4000K UGR19 ZBVR
Photometric and lighting design files		Document name
	IES file (IES)	PANEL D I 1200 36W4000K UGR19 ZBVR
	LDT file (Eulumdat)	PANEL D I 1200 36W4000K UGR19 ZBVR
	ULD file (DIALux)	PL D-I 120036W-4000KUGR19
	ROLF file (RELUX)	PANEL D-I 1200
	UGR file (UGR table)	PANEL D I 1200 36W4000K UGR19 ZBVR
	Light distribution curve type cone	PANEL D I 1200 36W4000K UGR19 ZBVR
	Light distribution curve type polar	PANEL D I 1200 36W4000K UGR19 ZBVR
CAD/BIM files		Document name
	BIM Revit 3D	Panel Direct Indirect
	CAD STEP 3D	PL D I

Tender texts	Document name
 Tender documents	PANEL DIRECTINDIRECT 1200 UGR 19 Zigbee 36 W 4000 K UGR19 ZBVR-EN

## LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075521889	Folding box 1	75 mm x 1,265 mm x 455 mm	4205.00 g	43.17 dm <sup>3</sup>
4058075521896	Shipping box 2	1,280 mm x 155 mm x 465 mm	9575.00 g	92.26 dm <sup>3</sup>

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

## References / Links

– For Guarantee see [www.ledvance.com/guarantee](http://www.ledvance.com/guarantee)

## DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.