


## DCB YPV 1200 (900 070)


- For use in PV systems according to IEC 60364-7-712
- Universally applicable in earthed and unearthed PV systems
- Prewired type 1 and type 2 combined lightning current and surge arrester for use in photovoltaic generator circuits
- Fault-resistant Y circuit prevents damage to the surge protective device in case of insulation faults in the generator circuit



Figure without obligation



Basic circuit diagram DCB YPV 1200

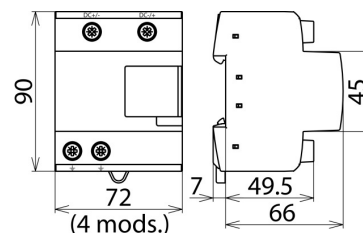

Dimension drawing DCB YPV 1200

Combined lightning current and surge arrester for use in photovoltaic power supply systems up to 1200 V d.c.

Type	DCB YPV 1200
Part No.	900 070
SPD according to EN 61643-31 / IEC 61643-31	type 1 + type 2 / class I + class II
Max. PV voltage [DC+ -> DC-] ( $U_{CPV}$ )	$\leq 1200$ V
Max. PV voltage [DC+/DC- -> PE] ( $U_{CPV}$ )	$\leq 1200$ V
Short-circuit current rating ( $I_{SCPV}$ )	10 kA
Nominal discharge current (8/20 $\mu$ s) ( $I_n$ )	20 kA
Max. discharge current (8/20 $\mu$ s) ( $I_{max}$ )	40 kA
Total discharge current (8/20 $\mu$ s) [DC+/DC- -> PE] ( $I_{total}$ )	40 kA
Total discharge current (10/350 $\mu$ s) [DC+/DC- -> PE] ( $I_{total}$ )	12.5 kA
Lightning impulse current (10/350 $\mu$ s) [DC+ -> PE/DC- -> PE] ( $I_{imp}$ )	6.25 kA
Voltage protection level [(DC+/DC-) -> PE] ( $U_p$ )	$< 3.8$ kV
Voltage protection level [DC+ -> DC-] ( $U_p$ )	$< 3.8$ kV
Response time ( $t_a$ )	$\leq 25$ ns
Operating temperature range ( $T_U$ )	-40 °C ... +80 °C
Operating state / fault indication	green / red
Number of ports	1
Cross-sectional area (min.)	1.5 mm <sup>2</sup> solid / flexible
Cross-sectional area (max.)	35 mm <sup>2</sup> stranded / 25 mm <sup>2</sup> flexible
For mounting on	35 mm DIN rails acc. to EN 60715
Enclosure material	thermoplastic, red, UL 94 V-0
Place of installation	indoor installation
Degree of protection	IP 20
Dimensions	4 module(s), DIN 43880
Approvals	KEMA, UL
Weight	509 g
Customs tariff number	85354000
GTIN	6942299504521
PU	1 Stk

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.