

# Product Environmental Profile

## Vigi DT40 / TG40






## General information

<b>Representative product</b>	Vigi DT40 / TG40 - A9N21454/ S1B10352
<b>Description of the product</b>	The main purpose of the Vigi DT40 and TG40 is to ensure protection of persons against electric shocks.
<b>Functional unit</b>	Protect during 20 years people and premises at risk of fire or explosion against insulation defects in circuit with assigned voltage 230V and rated current 25A. This protection is ensured in accordance with the following parameters: - Number of poles 1P+N - Sensitivity S 30mA - Type of differential protection Tp : A-SI



## Constituent materials

<b>Reference product mass</b>	122 g including the product, its packaging and additional elements and accessories
-------------------------------	--

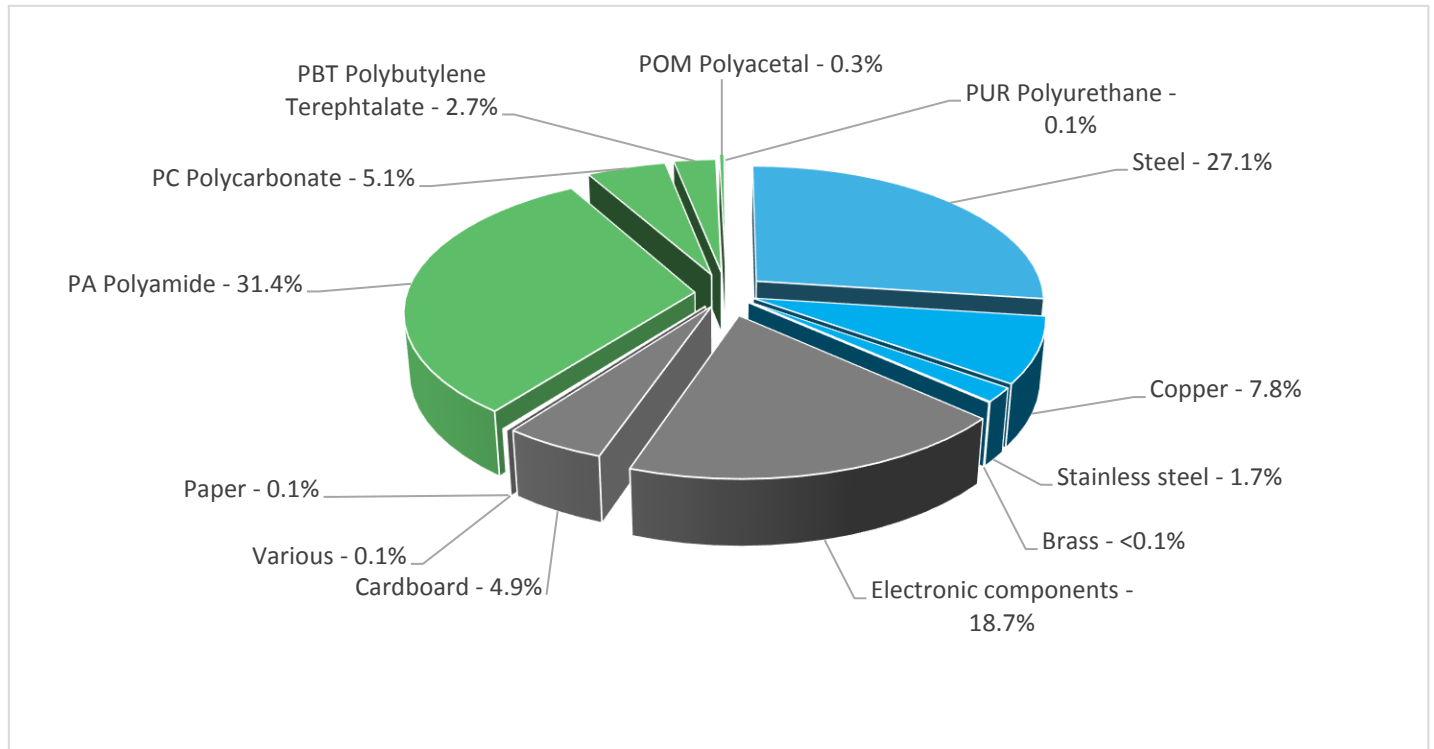

Plastics	39.6%
Metals	36.6%
Others	23.8%



## Substance assessment

Products of this range are designed in conformity with the requirements of the RoHS directive (European Directive 2011/65/EU of 8 June 2011) and do not contain, or only contain in the authorised proportions, lead, mercury, cadmium, hexavalent chromium or flame retardants (polybrominated biphenyls - PBB, polybrominated diphenyl ethers - PBDE) as mentioned in the Directive

As the products of the range are designed in accordance with the RoHS Directive (European Directive 2002/95/EC of 27 January 2003), they can be incorporated without any restriction in an assembly or an installation subject to this Directive.

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website <http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page>



## Additional environmental information

The Vigi DT40 / TG40 presents the following relevant environmental aspects


<b>Manufacturing</b>	Manufactured at a Schneider Electric production site ISO14001 certified
<b>Distribution</b>	Weight and volume of the packaging optimized, based on the European Union's packaging directive Packaging weight is 5.7 g, consisting of cardboard (98%), paper (2%)
<b>Installation</b>	Reference A9N21454 doesn't need the special installation, the waste generated are considered in installation stage.
<b>Use</b>	The product does not require special maintenance operations.
<b>End of life</b>	<p>End of life optimized to decrease the amount of waste and allow recovery of the product components and materials</p> <p>No special end-of-life treatment required. According to countries' practices this product can enter the usual end-of-life treatment process.</p> <p>Recyclability potential: <b>41%</b> Based on "ECO'DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).</p>



## Environmental impacts

<b>Reference life time</b>	20 years			
<b>Product category</b>	Blocks and differential switches			
<b>Installation elements</b>	No special installation components need during installation phase, but transport of packaging to disposal, and disposal of packaging accounted for during installation.			
<b>Use scenario</b>	Load rate: 50% of In Use time rate: 30% of RLT			
<b>Geographical representativeness</b>	Europe			
<b>Technological representativeness</b>	The main purpose of the Vigi DT40 and TG40 is to ensure protection of persons against electric shocks.			
<b>Energy model used</b>	<b>Manufacturing</b>	<b>Installation</b>	<b>Use</b>	<b>End of life</b>
	Energy model used: France	Electricity grid mix; AC; consumption mix, at consumer; < 1kV; EU-27	Electricity grid mix; AC; consumption mix, at consumer; < 1kV; EU-27	Electricity grid mix; AC; consumption mix, at consumer; < 1kV; EU-27

Compulsory indicators		Vigi DT40 / TG40 - A9N21454/ S1B10352					
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to mineral resources depletion	kg Sb eq	5.07E-05	4.99E-05	0*	0*	7.66E-07	0*
Contribution to the soil and water acidification	kg SO <sub>2</sub> eq	3.86E-02	1.70E-03	7.19E-05	0*	3.68E-02	2.99E-05
Contribution to water eutrophication	kg PO <sub>4</sub> <sup>3-</sup> eq	2.99E-03	7.45E-04	1.66E-05	0*	2.22E-03	8.41E-06
Contribution to global warming	kg CO <sub>2</sub> eq	9.67E+00	8.19E-01	1.57E-02	0*	8.82E+00	1.60E-02
Contribution to ozone layer depletion	kg CFC11 eq	9.59E-07	3.83E-07	0*	0*	5.75E-07	7.01E-10
Contribution to photochemical oxidation	kg C <sub>2</sub> H <sub>4</sub> eq	2.19E-03	1.61E-04	5.13E-06	0*	2.02E-03	3.10E-06
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Net use of freshwater	m <sup>3</sup>	3.20E+01	5.58E-03	0*	0*	3.20E+01	0*
Total Primary Energy	MJ	1.85E+02	8.94E+00	2.23E-01	0*	1.76E+02	1.45E-01

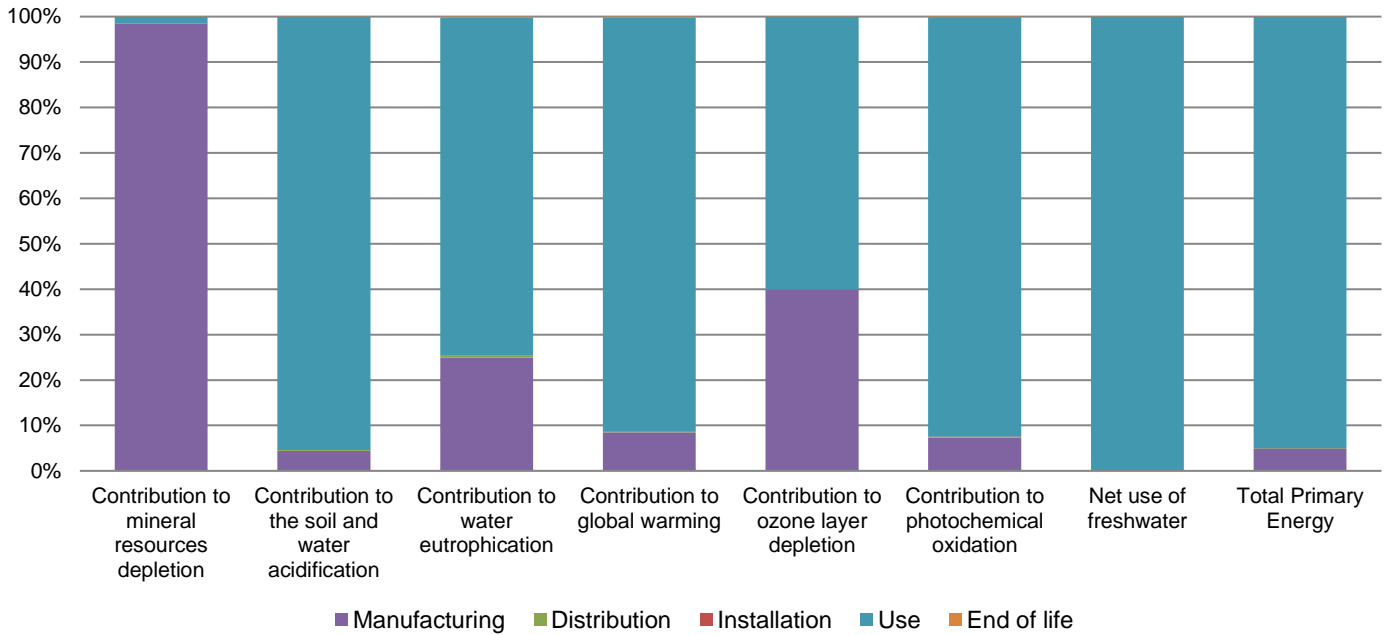

Optional indicators		Vigi DT40 / TG40 - A9N21454/ S1B10352					
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to fossil resources depletion	MJ	1.08E+02	7.85E+00	2.21E-01	0*	1.00E+02	1.32E-01
Contribution to air pollution	m³	5.03E+02	1.22E+02	6.70E-01	0*	3.80E+02	1.05E+00
Contribution to water pollution	m³	5.96E+02	2.28E+02	2.59E+00	0*	3.64E+02	1.27E+00
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Use of secondary material	kg	7.91E-03	7.91E-03	0*	0*	0*	0*
Total use of renewable primary energy resources	MJ	2.28E+01	3.52E-01	0*	0*	2.24E+01	0*
Total use of non-renewable primary energy resources	MJ	1.63E+02	8.59E+00	2.22E-01	0*	1.54E+02	1.45E-01
Use of renewable primary energy excluding renewable primary energy used as raw material	MJ	2.28E+01	3.51E-01	0*	0*	2.24E+01	0*
Use of renewable primary energy resources used as raw material	MJ	1.23E-03	1.23E-03	0*	0*	0*	0*
Use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	1.61E+02	7.12E+00	2.22E-01	0*	1.54E+02	1.45E-01
Use of non renewable primary energy resources used as raw material	MJ	1.48E+00	1.48E+00	0*	0*	0*	0*
Use of non renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*
Use of renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*
Waste categories	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Hazardous waste disposed	kg	3.54E+00	3.38E+00	0*	0*	4.60E-03	1.62E-01
Non hazardous waste disposed	kg	3.32E+01	3.64E-01	0*	0*	3.29E+01	0*
Radioactive waste disposed	kg	2.22E-02	2.51E-04	0*	0*	2.20E-02	0*
Other environmental information	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Materials for recycling	kg	7.63E-02	3.53E-02	0*	5.70E-03	0*	3.53E-02
Components for reuse	kg	0.00E+00	0*	0*	0*	0*	0*
Materials for energy recovery	kg	4.44E-03	2.22E-03	0*	0*	0*	2.22E-03
Exported Energy	MJ	0.00E+00	0*	0*	0*	0*	0*

\* represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version EIME v5.8.0, database version 2016-11 in compliance with ISO14044.

The use phase is the life cycle phase which has the greatest impact on the majority of environmental indicators (based on compulsory indicators).

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration number	ENVPEP1307052_V2	Drafting rules	PCR-ed3-EN-2015 04 02
Date of issue	08/2018	Supplemented by	PSR-0005-ed2-EN-2016 03 29
Validity period	5 years	Information and reference documents	<a href="http://www.pep-ecopassport.org">www.pep-ecopassport.org</a>
<i>Independent verification of the declaration and data</i>			
Internal	X	External	
<i>The elements of the present PEP cannot be compared with elements from another program.</i>			
<i>Document in compliance with ISO 14021:2016 « Environmental labels and declarations - Self-declared environmental claims (Type II environmental labelling) »</i>			

Schneider Electric Industries SAS

Country Customer Care Center  
<http://www.schneider-electric.com/contact>

35, rue Joseph Monier

CS 30323

F- 92506 Rueil Malmaison Cedex

RCS Nanterre 954 503 439

Capital social 896 313 776 €

[www.schneider-electric.com](http://www.schneider-electric.com)

Published by Schneider Electric

ENVPEP1307052\_V2

© 2017 - Schneider Electric – All rights reserved

08/2018