

# Lighting

**PHILIPS** 

## MASTER TL-D Super 80

### MASTER TL-D Super 80 36W/840 1SL/25

The MASTER TL-D Super 80 lamp offers more lumens per watt and better color rendering than TL-D standard colors. Furthermore, it has a lower mercury content. The lamp can be operated in existing TL-D luminaires.

### Warnings and Safety

• A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

### **Product data**

General Information		Lamp Current (Nom)	0.440 A	
Cap-Base	G13 [Medium Bi-Pin Fluorescent]			
Flux measurement reference	Sphere	Controls and Dimming		
		Dimmable	Yes	
Light Technical				
Color Code	840 [CCT of 4000K]	Mechanical and Housing		
Luminous Flux	3,350 lumen	Bulb Shape	T8 [26 mm (T8)]	
Color Designation	Cool White (CW)			
Chromaticity Coordinate X (Nom)	0.38	Approval and Application		
Chromaticity Coordinate Y (Nom)	0.38	Mercury (Hg) Content (Nom)	1.7 mg	
Correlated Color Temperature (Nom)	4000 K	Energy Consumption kWh/1000 h	37 kWh	
Luminous Efficacy (rated) (Nom)	93 lm/W	EPREL Registration Number	423,383	
Color rendering index (CRI)	80			
		Product Data		
Operating and Electrical		Full product code	871150063201240	
Power Consumption	36.8 W	Order product name	MASTER TL-D Super 80 36W/840 1SL/25	
		Order code	927921084023	


### **MASTER TL-D Super 80**

Numerator - Quantity Per Pack	1			
Numerator - Packs per outer box	25			
Material number (12NC)	927921084023			
Full product name	MASTER TL-D Super 80 36W/840 1SL/25			


## EAN/UPC - Case 8711500632029

### Dimensional drawing

Product	D (max)	A (max)	B (max)	B (min)	C (max)
MASTER TL-D Super 80	28 mm	1,199.4 mm	1,206.5 mm	1,204.1 mm	1,213.6 mm
36W/840 1SL/25					




### Photometric data




Spectral Power Distribution Colour - MASTER TL-D Super 80 36W/840 1SL/25

#### Lifetime

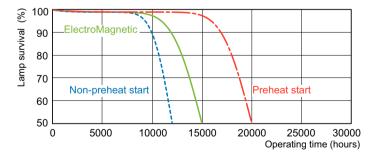






Life Expectancy Diagram - MASTER TL-D Super 80 36W/840 1SL/25

### **MASTER TL-D Super 80**

Lifetime

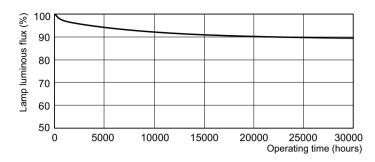

Lumen Maintenance Diagram - MASTER TL-D Super 80 36W/840 1SL/25



© 2023 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.

www.lighting.philips.com 2023, May 16 - data subject to change