

PL-Q 4 Pin

PHILIPS

Lighting

PL-Q 28W/840/4P 1CT/10BOX

PL-Q is an efficient, square-shaped compact fluorescent lamp, typically used in decorative-lighting luminaires. While offering the advantage of energy-efficient operation, it also provides design freedom for flat ceiling or wall fixtures in particular, due to its low built-in height and uniform spread of light. The 4-pin version is designed for operation on electronic gear.

Warnings and Safety

- Lamp light technical and electrical characteristics are influenced by operating conditions, i.e. lamp ambient temperature and operating position as well as applied HF control gear
- Shorter lamp life when often switching and not well pre-heated electrodes
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data


General Information		Operating and Electrical		
Cap-Base	GR10Q [GR10q]	Power Consumption	28.4 W	
Flux measurement reference	Sphere	Lamp Current (Nom)	0.320 A	
Light Technical		Controls and Dimming		
Color Code	840 [CCT of 4000K]	Dimmable	Yes	
Luminous Flux	2,050 lumen			
Color Designation	Cool White (CW)	Approval and Application		
Chromaticity Coordinate X (Nom)	0.38	Mercury (Hg) Content (Max)	3 mg	
Chromaticity Coordinate Y (Nom)	0.38	Mercury (Hg) Content (Nom)	4 mg	
Correlated Color Temperature (Nom)	4000 K	Energy Consumption kWh/1000 h	29 kWh	
Luminous Efficacy (rated) (Nom)	73.2 lm/W	EPREL Registration Number	423,614	
Color rendering index (CRI)	81			

PL-Q 4 Pin

Product Data	
Full product code	871150026993525
Order product name	PL-Q 28W/840/4P 1CT/10BOX
Order code	927939384040
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10


Material number (12NC)	927939384040			
Full product name	PL-Q 28W/840/4P 1CT/10BOX			
EAN/UPC - Case	8711500270078			

Dimensional drawing



Product	U (max)	D (max)	D1 (max)	C (max)	C1 (max)	F (max)	E (max)
PL-Q 28W/840/4P	46.5 mm	18.9 mm	33 mm	203 mm	76 mm	41 mm	200 mm
1CT/10BOX							

Photometric data



Spectral Power Distribution Colour - PL-Q 28W/840/4P 1CT/10BOX


Lifetime



Lumen Maintenance Diagram - PL-Q 28W/840/4P 1CT/10BOX

PL-Q 4 Pin

Lifetime

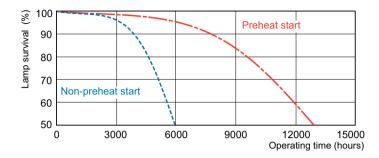

Life Expectancy Diagram - PL-Q 28W/840/4P 1CT/10BOX



© 2023 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.

www.lighting.philips.com 2023, May 15 - data subject to change